















## RG 11





Specification	ADVANCED GRADE	
Conductor		Copper Covered Steel 1.63 mm. (14 AWG)
Dielectric		Foamed PE + AL/P-Foil 7.10 mm.
Braid wire		Aluminum 0.16 X 168
Jacket		PVC 10.03 mm.
		PE 10.03 mm.
		PE + Galvanize Steel (1.83 mm.) 13.5 mm.

Specification	MILITARY GRADE	
Conductor		Bare Copper 1.63 mm. (14 AWG)
Dielectric		Foamed PE + AL/P-Foil 7.10 mm.
Braid wire		Bare Copper 0.16 X 192
		PVC 10.03 mm.
		PE 10.03 mm.
		PE + Galvanize Steel (1.83 mm.) 13.5 mm.

- CB-0111A RG 11/U Cable, 90% Shield, White Jacket
- CB-0111AP RG 11/U Outdoor, 90% Shield, Black Jacket
- CB-0111AM RG 11/U Outdoor, 90% Shield, Black w/Messenger

- CB-0110 RG 11/U Cable, 95% Shield, Black Jacket
- CB-0110P RG 11/U Outdoor, 95% Shield, Black Jacket
- CB-0110M RG 11/U Outdoor, 95% Shield, Black w/Messenger

## RG59

Specification	ADVANCED GRADE	
Conductor		Copper Covered Steel 0.81 mm. (20 AWG)
Dielectric		Foamed PE + AL/P-Foil 3.80 mm.
Braid wire		Aluminum 0.12 X 128
Jacket		PVC 6.10 mm.

Specification	MILITARY GRADE	
Conductor		Copper Covered Steel 0.81 mm. (20 AWG)
Dielectric		Foamed PE + AL/P-Foil 3.80 mm.
Braid wire		Bare Copper 0.11 X 144
Jacket		PVC 6.00 mm.


- CB-0105 RG 59 B/U Cable, White, 75 ohms, 90% Shield

- CB-0104 RG 59 B/U Cable, Black, 75 ohms, 95% Shield

## Assembly Cord



UC-7130-xx CCTV Patch Cord / Extension Cable (BNC-BNC)  
xx : 01 = 1 m. , 03 = 3 m. , 05 = 5 m. , 10 = 10 m. , 20 = 20 m. , 30 = 30 m.

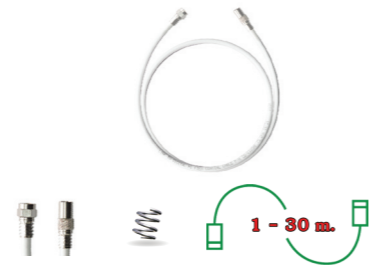


UC-7140-xx SATELLITE TV Patch Cord / Extension Cable (F-Pal)  
xx : 01 = 1 m. , 03 = 3 m. , 05 = 5 m. , 10 = 10 m. , 20 = 20 m. , 30 = 30 m.



UC-7150-xx TELEVISION Patch Cord / Extension Cable (Pal-Pal)  
xx : 01 = 1 m. , 03 = 3 m. , 05 = 5 m. , 10 = 10 m. , 20 = 20 m. , 30 = 30 m.

Distributed by

# Coaxial Cable (CCTV)

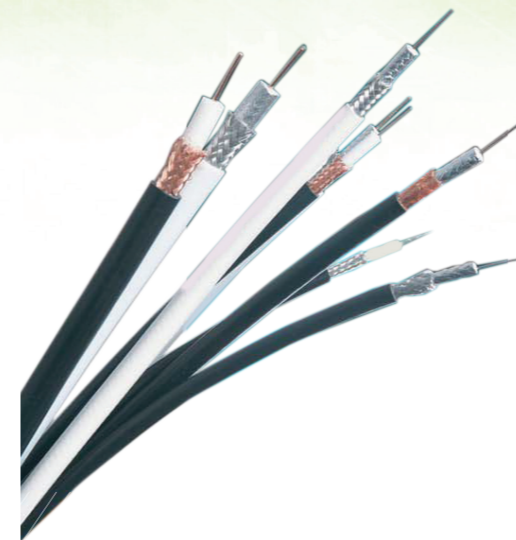

Easy Box  
100 m.



Reel in Box  
500 m.



Pull Box  
300 m.



Roll  
500 m.












# Coaxial Cable (CCTV)



## RG 6










## ORDER INFORMATION

Specification	ADVANCE GRADE	
Conductor		Copper Covers Steel 1.02 mm. (18 AWG)
Dielectric		Foamed PE + AL/P-Foil 4.57 mm.
Braid wire		Aluminum 0.12 X 144
Jacket		PVC 7.00 mm.
		PVC + CCA [18AWG] 11.56 mm.
		PE 7.00 mm.
		PE + CCA [18AWG] 11.56 mm.
		PE + Galvanize Steel (1.3 mm.) 9.16 mm.
		PE + CCA [18AWG] + Galvanize Steel [1.3 mm.] 13.86 mm.

CB-0106A	RG 6/U Cable, 95% Shield, Black Jacket
CB-0106A-WH	RG 6/U Cable, 95% Shield, White Jacket
CB-0106AWA	RG 6/U, 95% Shield, Black w/CCA Power Wire
CB-0106A-1	RG 6/U Cable, 95% Shield, Black Jacket
CB-0106A-1WH	RG 6/U Cable, 95% Shield, White Jacket
CB-0106AWA-1	RG6/U, 95% Shield, Black w/CCA Power wire
CB-0106AP	RG 6/U Outdoor, 95% Shield, Black PE Jacket
CB-0106AM	RG 6/U Outdoor, 95% Shield, Black PE w/Messenger
CB-0106APWA	RG 6/U Outdoor, 95% Shield, Black w/CCA Power Wire
CB-0106AMWA	RG 6/U Outdoor, 95% Shield, Black w/Messenger & ACS Power Wire

## RG 6

## ORDER INFORMATION

Specification	STANDARD PLUS GRADE	
Conductor		Copper Covers Steel 1.02 mm. (18 AWG)
Dielectric		Foamed PE + AL/P-Foil 4.57 mm.
Braid wire		Aluminum 0.16 X 144
Jacket		PVC 7.00 mm.
		PVC + BC [18AWG] 11.56 mm.
		PE 7.00 mm.
		PE + BC [18AWG] 11.56 mm.
		PE + Galvanize Steel (1.3 mm.) 9.16 mm.
		PE + BC [18AWG] + Galvanize Steel [1.3 mm.] 13.86 mm.





CB-0109S+	RG 6/U Cable, 96% Shield, Black Jacket
CB-0109S+3	RG 6/U Cable, 96% Shield, Black Jacket
CB-0109S+WH	RG 6/U Cable, 96% Shield, White Jacket
CB-0109SW+	RG6/U, 96% Shield, Black w/Copper Power wire
CB-0109S+1	RG 6/U Cable, 96% Shield, Black Jacket
CB-0109S+1WH	RG 6/U Cable, 96% Shield, White Jacket
CB-0109SW+1	RG 6/U, 96% Shield, Black w/Copper Power Wire
CB-0109SP+	RG 6/U Outdoor, 96% Shield, Black PE Jacket
CB-0109SM+	RG 6/U Outdoor, 96% Shield Black PE w/Messenger
CB-0109SPW+	RG 6/U Outdoor, 96% Shield, Black w/Copper Power Wire
CB-109SMW+	RG 6/U Outdoor, 96% Shield, Black w/Messenger & Copper Power Wire

## RG 6

Specification	STANDARD GRADE	
Conductor		Copper Covers Steel 1.02 mm. (18 AWG)
Dielectric		Foamed PE + AL/P-Foil 4.57 mm.
Braid wire		Aluminum 0.16 X 64
Jacket		PVC 6.86 mm.

CB-0109	RG 6/U Cable, 60% Shield, White Jacket (300 m.)
CB-0109-1	RG 6/U Cable, 60% Shield, White Jacket (100 m.)

## FLEXIBLE







Specification	ADVANCED GRADE	
Conductor		Stranded Bare Copper 0.27 X 7
Dielectric		Foamed PE + AL/P-Foil 3.66 mm.
Braid wire		Aluminum 0.16 X 64
Jacket		Soft PVC 6.10 mm.

CB-0106F FLEXIBLE Coaxial 75 Ohm, White, for Patch Cord

Specification	STANDARD GRADE	
Conductor		Copper Covered Steel 0.81 mm. (20 AWG)
Dielectric		Foamed PE + AL/P-Foil 3.66 mm.
Braid wire		Aluminum 0.12 X 112
Jacket		Soft PVC 6.10 mm.

CB-0105HF-1 FLEXIBLE Coaxial 75 Ohm, White, for Patch Cord

## RG 6

Specification	MILITARY GRADE	
Conductor		Bare Copper 1.02 mm. (18 AWG)
Dielectric		Foamed PE + AL/P-Foil 4.57 mm.
Braid wire		Bare Copper 0.12 X 168
Jacket		PVC 7.00 mm.
		PE 7.00 mm.
		PE + Galvanize Steel (1.3 mm.) 9.16 mm.

CB-0108	RG 6/U Cable, 95% Shield, Black Jacket
CB-0108P	RG 6/U Outdoor, 95% Shield, Black PE Jacket
CB-0108M	RG 6/U Outdoor, 95% Shield Black w/Messenger

Specification	MILITARY GRADE	
Conductor		Stranded Bare Copper 0.2 X 16
Dielectric		Foamed PE + AL/P-Foil 33.65 mm.
Braid wire		Bare Copper 0.12 X 128
Jacket		PVC 6.20 mm.

CB-0104F FLEXIBLE Coaxial 75 Ohm, Black, for ELEVATOR