


24 FIBER SPLICING TRAY



DESCRIPTION / APPLICATION

- For use with all LINK rack mount enclosure and wall mount enclosure.
- Made from ABS and accommodated 24 fusion splicing per tray.
- Protects and manages fiber splices
- Minimum fiber bending radius is maintained
- Used for multimode and single mode

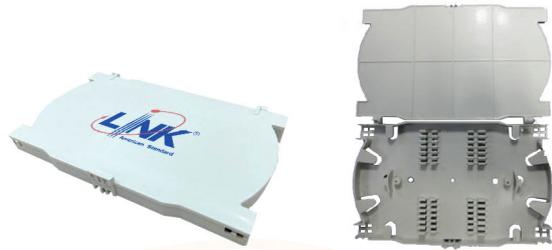

Part Number	Description	Dimension (mm.)	Color
UF-2082	24 Fiber Splicing Tray	158 x 103.5 x 10.4	Light Grey

FUSION PROTECTOR SLEEVE

DESCRIPTION / APPLICATION

- For use with splicing tray
- Protects fiber splices
- Clear outer tube and Stainless steel needle.



Part Number	Description	Dimension (mm.)	Color
SV-2252A-12	Fusion Splice Protector Sleeve, 60 mm., Slim Type	2.5 x 60	Clear
SV-2253-10	Fusion Splice Protector Sleeve, 60 mm., Large Type	5.0 x 60	Clear
SV-2252SET	HEAT SHRINK with sleeve for FLAT FTTH	5.5 x 6.6 x 120 (Pre-Heat Shrinkable Tube) 5.0 x 60 (Protector Sleeve)	Black Clear

OTDR DUMMY CABLE BOX

Designed to aid in the testing of fiber optic cable when using an OTDR. Launch Fiber Box is used with Optical Time Domain Reflectometers (OTDR's) to help minimize the effects of the OTDR's launch pulse on measurement uncertainty. Available in many different configurations and fiber lengths.

SPECIFICATION

- Operating Temperature : -40°C to +50°C
- Typical Loss : <1dB@1310nm for 1000 meters
- Standard Attachment : Insert Return Loss Report
OTDR Test Report
3D Test Report (Grade A only)



PART NUMBER : UF - [A] - [B] - [C] - [D]

A = Input Connector	B = Output Connector	C = Fiber	D = Length
FC - FC/UPC	FC - FC/UPC	9 - 9/125 (OS2)	0.5 - 0.5 km
SC - SC/UPC	SC - SC/UPC	6 - 62.5/125 (OM1)	1.0 - 1.0 km
ST - ST/UPC	ST - ST/UPC	5 - 50/125 (OM2)	2.0 - 2.0 km
FCA - FC/APC	FCA - FC/APC	4 - 50/125 (OM3)	-
SCA - SC/APC	SCA - SC/APC	-	-
LC - LC/UPC	LC - LC/UPC	-	-

For Example : Single mode fiber, input FC/UPC, output SC/UPC, 1000 meters UF-FC-SC-9-1.0
Remark : Other special fiber or connectors are available upon request.