

INDOOR DISTRIBUTION




DESCRIPTION / APPLICATION

- LINK distribution fiber optic cables are designed for indoor communication. These cables are designed to save conduit space and ideal for moderate distance trunking applications. Small size and high strength are features of these cable.
- Application support IEEE802.3 (LAN, Ethernet Fast Ethernet, Gigabit Ethernet and 10G, 40G, 100G Ethernet) ATM, FDDI, Fiber Channel, CATV, CCTV, FTTX or other.

STANDARDS

- ANSI/TIA-568-C.3, ANSI/TIA-568.3-D
- ANSI/ICEA 596
- Telcordia (Bellcore) GR-409-CORE
- ITU-T G.651 (Multimode)
- ITU-T G.652D (Singlemode)
- ISO/IEC 11801 : 2017
- IEC 60332-1, IEC 60332-3
- IEC 61034-2, IEC 60754-2
- IEC 60793, IEC 60794-1-2
- EN 50173-1, UL, FR-LSZH & OFNR
- RoHS Compliant

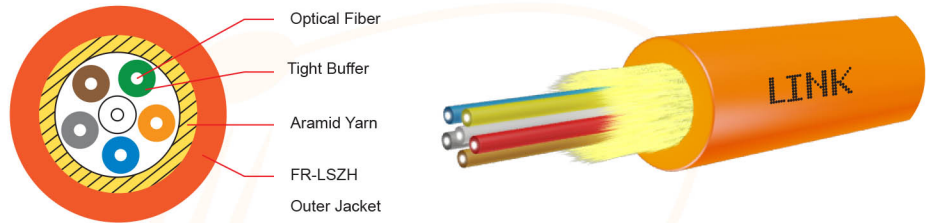

INDOOR DISTRIBUTION
UFCX2XX

FEATURES / CONSTRUCTION

- High performance multimode (OM2, OM3, OM4 and OM5) and singlemode (OS2 or G.652D) fiber optic cable.
- Fiber colors identification comply to TIA/EIA-598-C and EIA-359-A.
- 900 μm tight buffer easy to strip and terminated for direct connectorization with all common connector types.
- Aramid yarns provide for strength member.
- Flame-retardant with LSZH (Low Smoke Zero Halogen) outer jacket.

OPTICAL PERFORMANCES

Optical Transmission Performance	Singlemode		Multimode		
	1310/1383/1550/1625 nm		850/1300 nm		850/953/1300 nm
	9/125 μm (OS2)	50/125 μm (OM2)	50/125 μm (OM3)	50/125 μm (OM4)	50/125 μm (OM5)
Max. Attenuation (dB/km)	0.35 / 0.35 / 0.21 / 0.23	2.7 / 0.8	2.7 / 0.8	2.7 / 0.8	2.7 / 2.0 / 0.8
Typ. Attenuation (dB/km)	0.33 / 0.31 / 0.19 / 0.20	2.5 / 0.7	2.3 / 0.6	2.3 / 0.6	2.3 / 1.8 / 0.6
Bandwidth (MHz/km)	N / A	500 / 500	1500 / 500	3500 / 500	3500 / 1850 / 500
850 nm Laser bandwidth (MHz/km)	N / A	N / A	2,000	4,700	4,700
Numerical Aperture	0.13 \pm 0.01	0.200 \pm 0.015	0.200 \pm 0.015	0.200 \pm 0.015	0.200 \pm 0.015

MECHANICAL PROPERTIES

- Max. Tensile Load, Installation
- Cable Diameter, approx.
- Cable Weight, approx.
- Min. Bending Radius, Installation / Operation
- Installation / Operation Temperature
- Storage / Shipping Temperature

UFCX2XX

4 ~ 12 Core

660 / 330

4.8 ~ 6.8 \pm 0.2

21 ~ 42

15x / 10x

-20°C to +80°C

-40°C to +85°C

N

mm

kg / km

Cable Diameter

PART NUMBER : INDOOR DISTRIBUTION

Description	4 Core	6 Core	12 Core
Singlemode, 9/125 μm , OS2	UFC9204LSZH	UFC9206LSZH	UFC9212LSZH
Multimode, 50/125 μm , OM2	UFC5204LSZH	UFC5206LSZH	UFC5212LSZH
XG Multimode, 50/125 μm , OM3	UFC4204	UFC4206	UFC4212
Multimode, 50/125 μm , OM4	UFC3204	UFC3206	UFC3212
Multimode, 50/125 μm , OM5	UFC2204	UFC2206	UFC2212