


Category 6A

[650MHz] F/UTP Cables, FR-LSZH



US-9266LSZH

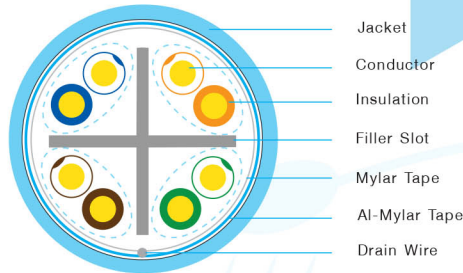

STANDARD

- ANSI/TIA-568.2-D Category 6A
- ISO/IEC 11801 : 2017 Class EA
- EN 50173-1 Category 6A
- IEC 61156-5 Category 6A
- EN 50288-10-1
- IEC 60332-1-2, IEC 61034-2, IEC 60754-2
- UL Listed CM, CMR, CMP and LSZH
- 3P Verified to Category 6A
- UL E197771, RoHS Compliant

APPLICATION

- Structure cabling for horizontal and building backbone
- 10G BASE-T (IEEE 802.3an)
- 2.5G/5G BASE-T (IEEE 802.3bz)
- 10/100/1000 BASE-T (IEEE 802.3i/u/ab)
- IEEE 802.3af/at (PoE/PoE+), IEEE802.3bt (Type4)
- 52/155/622 Mbps and 1.2 Gbps ATM
- 4/16 Mbps Token Ring
- TP-PMD, TPDDI, ISDN, CDDI, VoIP
- HD BaseT 2.0 standard, Baseband, Broadband
- Digital & Analog for data, video and audio application

MECHANICAL PROPERTIES

Minimum Bending Radius	4 X Cable Diameter
Tensile Strength	110 N (25lbf)
Ultimate Breaking Strength	>400N (90lbf)
Installation / Operating temperature	-20°C to 75°C
Storage Temperature	-20°C to 80°C

Part No.	UL/NEC Flame Rating	Conductor	Jacket	Diameter (mm.)	Color	Packaging
US-9266LSZH	LSZH	23AWG Solid Bare Copper	FR-LSZH	7.5	Aqua Blue	305m/Roll
US-9266LSZH-1	LSZH	23AWG Solid Bare Copper	FR-LSZH	7.5	Aqua Blue	100m/Easy Box
US-9266	CMR	23AWG Solid Bare Copper	FR-PVC	7.6	White	305m/Roll

ELECTRICAL CHARACTERISTICS

Impedance	: 100±5Ω, 1 MHz to 650 MHz
Mutual Capacitance	: 5.6 nFMax / 100m
Capacitance, Unbalance	: 160 pF Max / 100m
DC Resistance	: 6.658 ohm Max/100m
DC Resistance, Unbalance	: 3% Max.
Insulated Resistance	: 5000 MΩ/Km
Dielectric Strength	: 1kV/min
Propagation Delay	: 534 ns/100m Max @650MHz
Delay Skew	: 25 ns Max

CONSTRUCTION / MATERIAL

Conductor	: 23AWG Solid Bare Copper
Insulation	CMR, LSZH : HDPE CMP : FEP
Mylar	: Mylar Tape
Drain Wire	: Tinned Copper
Shielded	: AL-Mylar Tape
Jacket	CMR : FR-PVC CMP : FR-PVC(Low Smoke) LSZH : FR-LSZH

FREQUENCY (MHZ)	INSERTION LOSS (dB/100m)	RL MIN.(dB)	NEXT MIN.(dB)	PS NEXT MIN.(dB)	ACRF MIN.(dB)	PS ACRF MIN.(dB)	PS ANEXT MIN.(dB)	PS AACRF (dB/100m)
1.0	2.0	20.0	78.3	76.0	71.8	68.8	67.0	67.0
31.25	10.4	23.6	55.9	53.9	41.9	38.9	67.0	48.3
62.50	14.9	21.5	51.4	49.4	35.9	32.9	65.0	42.3
100.0	19.0	20.1	48.3	46.3	31.8	28.8	62.5	38.2
200.0	27.5	18.0	43.8	41.8	24.6	22.8	58.0	32.2
250.0	31.0	17.3	42.3	40.3	23.8	20.8	56.5	30.2
300.0	34.2	16.8	41.1	39.3	22.3	19.3	55.3	28.7
500.0	45.3	15.2	37.8	35.8	17.8	14.8	52.0	24.2
550.0	47.7	17.2	37.2	35.2	-	-	-	-
650.0	52.4	16.7	36.1	34.6	-	-	-	-